



# BISON45 OTI



## CONTROL UNITS:

BISON45 OTI — CP,BISON OTI 154



### INDUSTRIAL USE

control unit with built-in receiver, magnetic encoder and inverter  
oil lubricated reductions  
IP68 limit switch  
personalised release key




**up to 4500 kg**

## 400 Vac

- Three phase 400 Vac geared motor, ventilated for intensive use
- Security sensor which interrupts the motor power supply during release operations
- The encoder device ensures precision in the gate moving phases
- Full metal mechanics and oil lubrication. The type of oil used ensures maximum efficiency even at low temperatures
- Casing protective treatment and paint
- The inverter technology allows for more precise adjustment of the gate moving phases, and increased crush prevention security
- Optional built-in FTC.S photocells, available as accessory

**Foundation plate not included**

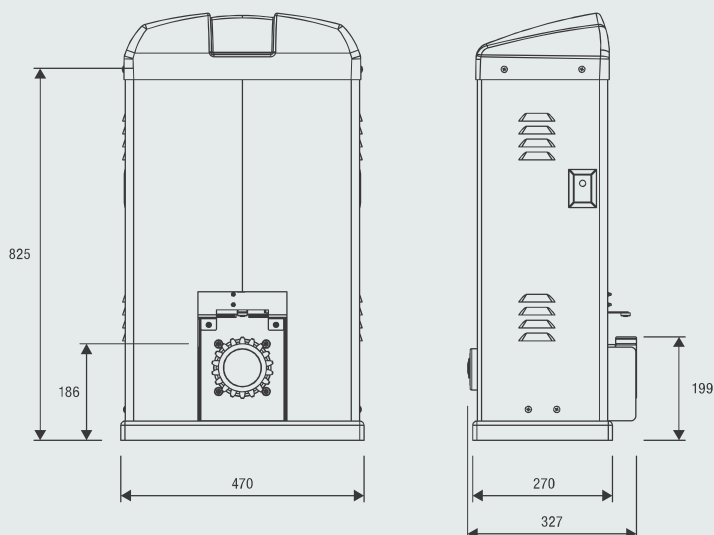

Weight (kg)	Speed (m/min)
4,500	10
3,500	11
2,600	13
2,000	15
1,150	19



**RI.M6Z**  
M6 galvanised rack to weld 30x30x2000 mm.



**BISON.P45**  
Foundation plate with coach screws and support base for height adjustment. Motor fixing distance 400x210 mm n.4 Ø 14,5 mm.



**RF.SUN**  
Battery-operated device recharged by means of a photovoltaic panel applied on a mobile edge.



**RF**  
Device with a non rechargeable battery, with guaranteed duration 2 years.



**SC.RF**  
Device powered at 12/24 Vdc with self-test function and 2 outputs for connection to the electronic control units.



**ID.TA**  
Warning board.



**IRI.TX4VA**  
4-channel transmitter with Advanced Rolling Code and Rolling Code.



**IRI.TX4AK**  
4-channel transmitter with Advanced Rolling Code and Fixed Code.



**IRI.LAMP**  
White full range flashing light, 20-255 VAC with built-in aerial.



**IRI.KPAD**  
Battery operated wireless vandal-proof digital keypad with alert buzzer and backlit buttons. Triple coding: Rolling Code, Programmable Code and Advanced Rolling Code. 254 memorisable codes.



**FTC.S**  
24 Vac/dc surface mounting photocell. It is possible to synchronise up to 4 pairs of photocells.



**DA.2S**  
Electronic board that allows synchronised movement of 2 automation devices (opposed sliding gates).

TECHNICAL DATA	BISON45 OTI
Power supply	≈ 400 Vac (50-60Hz)
Motor supply	≈ 400 Vac
Max absorbed current	2,85 A
Max Thrust	5000 N
Max opening speed	19 m/min
Duty cycle	intensive use
Protection level	IP44
Operating temperature	-20°C /+50°C
Lubrication	OIL
Max gate weight	4500 kg
Driving gear for rack	M6 Z18
Weight	66 kg
Items no. per pallet	4